

# ZGSM SOLAR

All in Two Street Light Solution

## PV7-Leaf





# ZGSM SOLAR



All-in-Two Version



All-in-One Version Available

## Integrated Designed Solar Solutions for Road and Urban Applications

Our solar street light for outdoor residential and public applications gives you a full customizable option to suit all your off-grid solar lighting requirements.

ZGSM SOLAR combined with LED luminaires, provides a reliable lighting solution with a high Ingress Protection level that withstands high ambient temperatures and vandalism. These luminaires are a sustainable off-grid performer with a superior lumen/ watt ratio. The photovoltaic energy conversion is optimized by efficient Monocrystalline solar module technology to maximise solar energy. This, in conjunction with our Maximum Power Point Tracking (MPPT) charging system and our lithium energy storage technology, provides a state-of-the-art quality system, offering the required system autonomy and providing a long-lasting solution to operate in any of our very challenging environmental conditions.

ZGSM SOLAR offers a renewable lighting solution to operate in any of our very challenging environmental conditions.

## Key Advantages


- All in Two design.
- Microwave and human body induction control, realize intelligent power saving mode.
- Adopting MPPT intelligent controller, the charging efficiency is up to 96%.
- High-efficiency monocrystalline silicon solar panels with a conversion efficiency of 23%.
- Intelligent battery management, prolong the service life of lithium battery.
- Intelligent power mode, power adjustable automatically according to the battery level.
- 10-period programmable load power/ time control.
- Extensible to IoT remote communication monitoring function.



OFF-GRID  
AREAS



URBAN &  
RESIDENTIAL  
STREETS &  
ROADS



CAR PARKS



SQUARES &  
PEDESTRIAN  
AREAS



BIKE &  
PEDESTRIAN  
PATHS



SECURITY  
LIGHTING

# Characteristics

## GENERAL INFORMATION

Recommended installation height	5 to 12m (sensor is not available over 10m)
Components included	Street luminaire,
	Monocrystalline solar panel with build-in lithium battery and charge controller
	Pole/Bracket/Arm (on request)
Autonomy days	5-7 days
System voltage	12/24V DC
Geographical location	Designed and optimised for locations with sunshine greater than 4.5 hours
Wind speed rating	126 km/hr
Working mode	Factory Default- Timer Dimming
	2 hrs at 100% brightness
	6 hrs at 30% brightness
	Rest time at 100% brightness

## STREET LUMINAIRE

LED	LUMILEDS or others on request
Optics	Type II, Type III
CRI	Ra>70 (default) / Ra>80
CCT	1800-6500K
Housing	High pressure die-cast aluminium
Cover	UV-resistant polycarbonate
Housing finish	Gray (RAL9007)
Impact resistance	IK09/ IK10
Type of protection	IP66
Upward light output ratio (ULOR)	0
Working Environment	-40°C ~ +50°C
	10%~90%RH
Lifespan L70 at 25 °C	100,000h
Pole diameter	48-60mm (suggestion)

## INTEGRATED POWER GENERATION, STORAGE AND CONTROL UNIT

### SOLAR PANEL

Technology / Rated lifetime	Monocrystalline solar panel : 25 years / 80%
Peak rated wattage	160-240W(others on request)
Robustness	Hail and corrosion resistant
Material	Extruded aluminium
	Tempered glass

### ENERGY STORAGE

Technology / Expected lifetime	Lithium battery / 8 years
Capacity	1228WH-2304WH
Maintenance free	Yes
Working temperature	-10°C up to +60°C
Material	LiFePO4

### CHARGE CONTROLLER

Charge algorithm	Maximum power point tracking (MPPT)
Rated lifetime	12 years
Optional function	IoT remote communication
Daylight sensor	Yes
Material	Extruded aluminium
Working mode	Motion / PIR Sensor /Timer (Default)

## CABLES/CONNECTORS

Cables(standard)	2.5m 2x1.5m <sup>2</sup> cable with male plug on one end and another with bare end
Connectors(optional)	IP68 waterproof 2 cores

## POLE /BRACKET /ARM (ON REQUEST)

Brackets for solar panels	Hot-dipped galvanised mild steel
Arm for street luminaire	Hot-dipped galvanised mild steel
Poles	Hot-dipped galvanised graded steel
Anchor bolts	Hot-dipped galvanised graded steel

# Key Features

## Overview



Fully integrated solar system, includes luminaire, solar panel (build in lithium battery and solar controller) and pole



Solar Module

Highly efficient monocrystalline solar panel technology to maximise solar energy conversion

## Street Luminaire




Series Leaf

You can also choose the following street lights



Series Nova



Series Kmini/Kmini2



Series Rifle



Series Falcon

Highly efficient, performing and robust LED street light luminaire (up to 180 lm/W)

## Integrated Solar Panel , Lithium Battery and Controller Unit

The solar panel frame is integrated with the lithium battery pack housing, utilize a high-quality, 100% new Lithium Iron Phosphate (LiFePO4) battery, featuring a built-in MPPT controller that stabilizes voltage and limits current. This controller intelligently monitors the battery voltage and effectively protects the lithium battery pack from damage due to excessively high or low output voltage. It thereby prolongs the battery's life. The system has a simple structure yet delivers high performance. It is stable and easy to install and maintain.



Build-in MPPT Smart Controller





LiFePO4 Lithium Battery



Robust and Corrosion-resistant IP66 6063 Aluminum Shell

Fitter is made of Q235 steel, with a default tilt angle of 15° (custom angles available)

# Luminaire Performance


Model	Model No	Power consumption (W)	3030 Version		5050 Version		Ultra Version (Only valid for CCT 4000K)	
			Luminaire efficacy (lm/W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Luminaire output flux (lm)
<b>S</b> 	ZGSM-ST22-40S	40	155	6200	165	6600	190	7600
	ZGSM-ST22-40S*	40	170	6800	175	7000	195	7800
	ZGSM-ST22-50S	50	155	7750	165	8250	189	9450
	ZGSM-ST22-50S*	60	165	8250	175	8750	194	9700
	ZGSM-ST22-60S	60	155	9300	165	9900	190	11400
	ZGSM-ST22-80S	80	155	12400	165	13200	186	14880
<b>M</b> 	ZGSM-ST22-90M	90	160	14400	175	15750	192	17280
	ZGSM-ST22-90M*	90	175	15750	180	16200	199	17910
	ZGSM-ST22-100M	100	160	16000	175	17500	195	19500
	ZGSM-ST22-100M*	100	175	17500	180	18000	199	19900
	ZGSM-ST22-120M	120	160	19200	175	21000	195	23400

-The above values are calculated for products with a CCT greater than 4000K and a CRI of 70. For products with a CCT of less than 4000K, or a CRI greater than 75, the values are approximately 5% lower than those stated above.


-The above values displayed are subject to a  $\pm 5\%$  tolerance.

## Light Distributions

3030 Version



5050 Version



## Packing Information






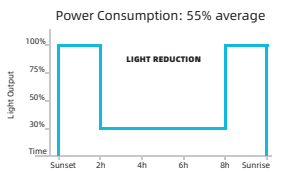

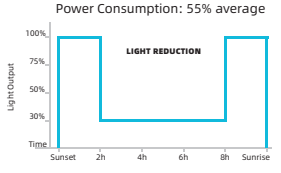

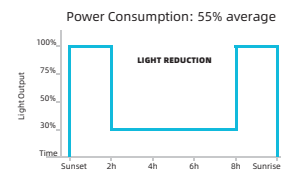

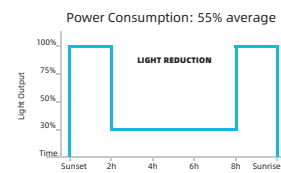

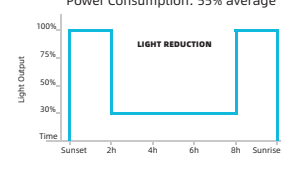

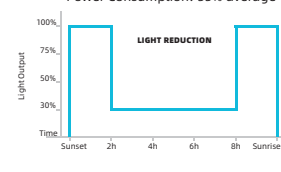
Model	Part	Net Weight	Gross Weight	Pack Type	Carton Size	Package for Solar Panel	Package for Battery	Package for Fitter
PV7-80	Solar Panel	12.2kgs	13.5kgs	1 unit/ctn	1170x90x830mm			
	Battery	20.2kgs	21.2kgs	1 unit/ctn	825x400x170mm			
	Fitter	4.6kgs	5kgs	1 unit/ctn	325x220x230mm			
PV7-90	Solar Panel	13.2kgs	14.5kgs	1 unit/ctn	1300x90x830mm	 Plywood frame in samples shipment	 UN Cartons in both samples and batches shipment	 Cartons in samples shipment
	Battery	21.5kgs	22.5kgs	1 unit/ctn	825x400x170mm			
	Fitter	4.6kgs	5kgs	1 unit/ctn	325x220x230mm			
PV7-100	Solar Panel	17.5kgs	19.0kgs	1 unit/ctn	1400x90x830mm	 Plywood Pallet in small batches shipment	 Plywood Box in small batches shipment	
	Battery	23.8kgs	24.8kgs	1 unit/ctn	825x400x170mm			
	Fitter	4.6kgs	5kgs	1 unit/ctn	325x220x230mm			
PV7-120	Solar Panel	19.0kgs	20.5kgs	1 unit/ctn	1590x90x830mm	 Plywood Pallet in small batches shipment	 Plywood Box in small batches shipment	
	Battery	26.7kgs	27.7kgs	1 unit/ctn	825x400x170mm			
	Fitter	4.6kgs	5kgs	1 unit/ctn	325x220x230mm			

-Note: For sample packing, add 20mm to each dimension (length, width, and height) of the solar panel cartons with wooden frame.

-The above data is for reference only, the actual order packaging may be different, please consult ZGSM team to finalize the packaging data.

-Refer to the luminaire datasheet for luminaire packaging information.

# Configuration Matrix of Main Body


Photo of Main Body	Model	Load Power	 Lithium Battery	 Solar Panels	 Autonomy days	 Sunshine	Optimim Profiles
	ZGSM-PV7-40T	40W	48AH/25.6V	160W/36V	5-7 days <sup>*1</sup>	2.5 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>
	ZGSM-PV7-60T	60W	54AH/25.6V	160W/36V	5-7 days <sup>*1</sup>	3.8 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>
	ZGSM-PV7-80T	80W	60AH/25.6V	160W/36V	5-7 days <sup>*1</sup>	4.5 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>
	ZGSM-PV7-90T	90W	66AH/25.6V	180W/36V	5-7 days <sup>*1</sup>	4.5 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>
	ZGSM-PV7-100T	100W	78AH/25.6V	200W/36V	5-7 days <sup>*1</sup>	4.5 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>
	ZGSM-PV7-120T	120W	90AH/25.6V	240W/36V	5-7 days <sup>*1</sup>	4.5 hours	 <p>Power Consumption: 55% average</p> <p>Light Output</p> <p>Time</p> <p>Sunset 2h 4h 6h 8h Sunrise</p> <p>LIGHT REDUCTION</p>

\*<sup>1</sup> Autonomy days are calculated based on the controller turning on the intelligent power mode.



# Dimensions

## Main Body


Product dimension: mm




PV7-40T/60T/80T





PV7-90T




Suitable for  $\phi 70-76\text{mm}$  pole

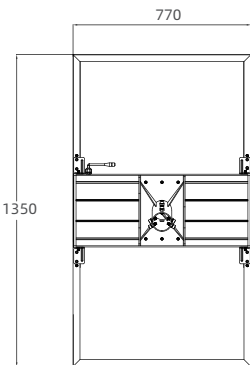


PV7-100T

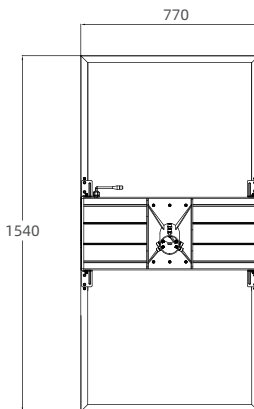


PV7-120T




## Luminaire

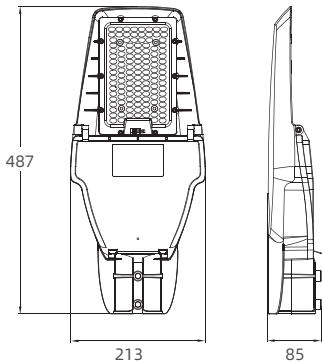

Version S



Suitable for  $\phi 50-60$  pole

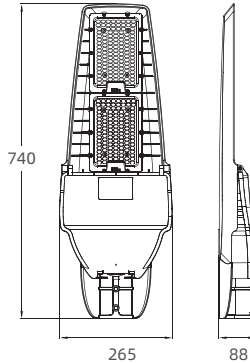


Version M

# Technical Definitions

## Optidim



Intelligent luminaire drivers are programmed if required in the factory with complex dimming profiles. Up to 6 combinations of time intervals and light levels are possible. This feature does not require any extra wiring. The period between switching on and switching off is used to activate the preset dimming profile.

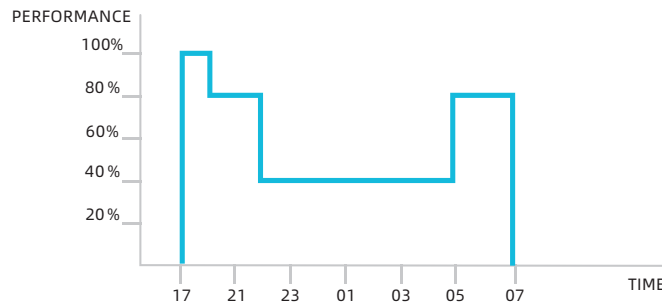


## Autonomy Days



Autonomy Days refers to the number of nights/cycles a luminaire will continue to work without receiving a charge/being charged from the solar panel, due to adverse weather conditions. The number of autonomy days is aligned to the energy storage unit's depth of discharge resulting in sufficient capacity after a night/cycle.

## Energy Storage




### Lithium-ion

Lithium-ion based battery packs have the added advantage that they have a higher power density than lead, which means they have more available power for the same mass of a lead battery. This advantage, combined with the longer life expectancy and higher rate of depth of discharge (DOD), offering an attractive option for solar lighting applications, resulting in a longer battery lifetime.

Battery pack operating temperature: -10°C to +60°C

## Solar Module




### Monocrystalline Solar Panel

Monocrystalline silicon solar panels excel in solar street lighting with up to 23% efficiency, high heat resistance, and over 25 years of durability, ensuring consistent performance in various climates with minimal upkeep. Their effectiveness in low-light conditions also ensures reliable lighting, making them ideal for efficient and sustainable street lighting systems.



## Solar Controller




### MPPT Charge Controller


Using MovingTrack MPPT maximum power tracking technology, the tracking efficiency is higher and faster. Compared with PWM charge controller, MPPT charge controller can collect 30% more energy under cloudy conditions. A variety of intelligent power modes are available for choice, with load power adjustable automatically according to the battery level. Battery charge and discharge high and low temperature protection, with operating temperature settable. Multiple protections such as battery/PV reverse polarity protection, LED short-circuit/open-circuit/limited. Full aluminum housing, IP67 waterproof rating, applicable to a variety of harsh environments. Infrared wireless communication, allowing for setting/reading parameters, reading status, etc.

## Solar Energy

Solar panel and battery sizing for solar street lights are determined by local daily sunlight hours. Our standard configurations are designed for areas with an average of 5 hours of sunlight per day. Check the world solar irradiance map to gauge sunlight in your area and contact us for a customized solar street light solution.

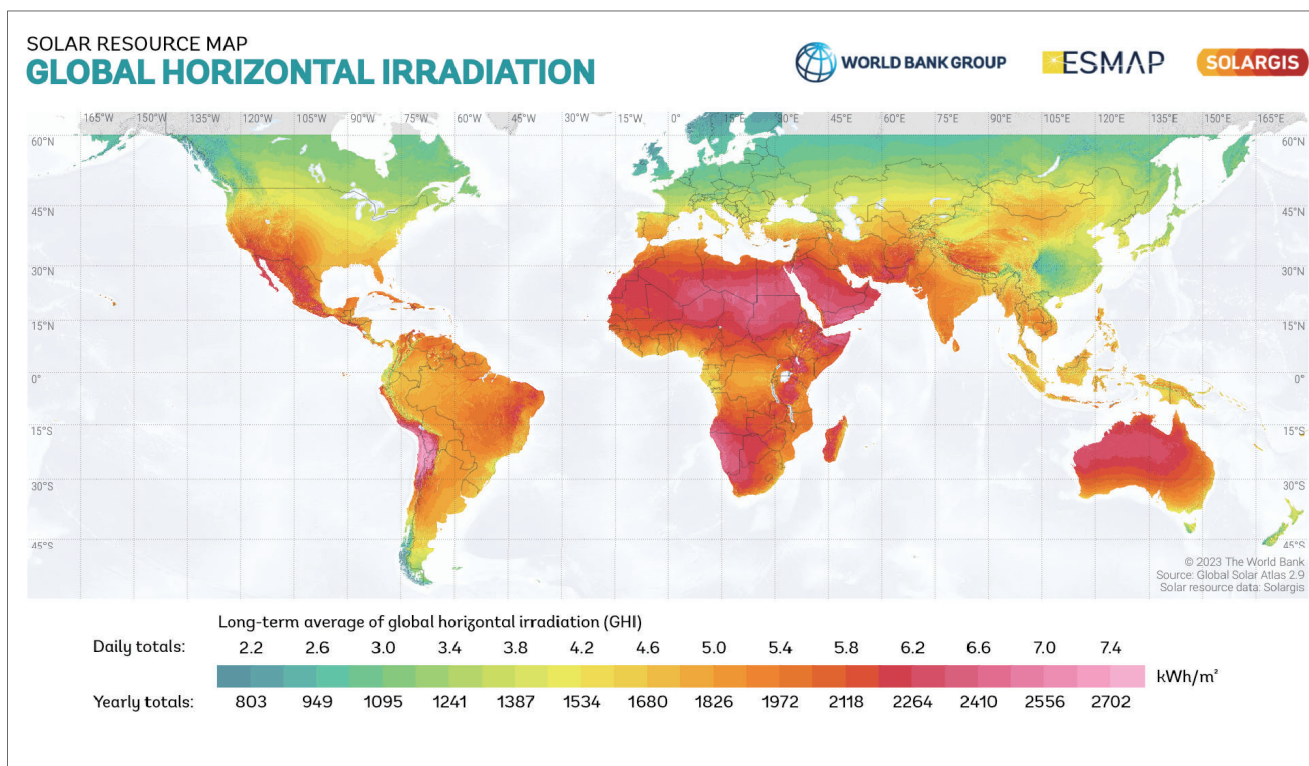

## Integrated Motion/PIR Sensor (Optional)

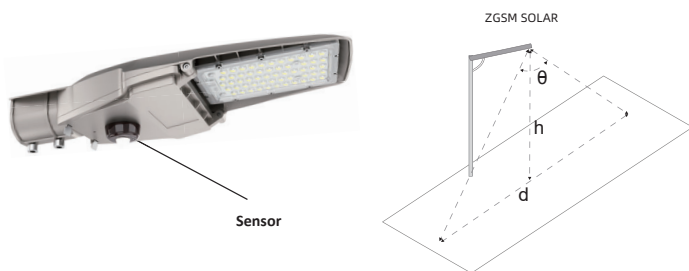

Inductive Type	$\theta$ (Angle)	h (Height of Lamp)	d (Inductive Width)
PIR Sensor	60°	6~8m	6~10m
Motion Sensor	65°	6~10m	7~10m

# Pole on Request

## Technical Information

Pole Size				Arm			Base Plate					Anchor Bolts			Pole Foundation		
H	d1	d2	T1	L	d3	∠	L1	L2	T2	K	Q1	L3	M	Q2	W1	W2	L4
5000	65	120	3.0	800	60	12°	250	177	10	20x42	4pcs	500	φ16	4pcs	500	500	600
6000	65	130	3.0	800	60	12°	280	198	12	20x42	4pcs	500	φ16	4pcs	560	560	600
7000	65	140	3.0	1000	60	12°	280	198	12	20x42	4pcs	500	φ16	4pcs	560	560	600
8000	75	165	3.0	1000	60	12°	320	226	14	24x50	4pcs	900	φ20	4pcs	640	640	1000
9000	75	175	3.5	1200	60	12°	320	226	16	24x50	4pcs	900	φ20	4pcs	640	640	1000
10000	75	185	4.0	1200	60	12°	320	226	16	26x54	4pcs	1100	φ22	4pcs	640	640	1200
12000	90	220	4.0	1500	60	12°	400	300	20	28x58	4pcs	1100	φ24	4pcs	800	800	1200

## Abbreviations and Notes

### Abbreviations

#### Pole Size

1. All dimensions are in mm
2. H = Overall height of pole
3. d1 = Top diameter of pole
4. d2 = Bottom diameter of pole
5. T1 = Shaft Wall Thickness of pole

#### Arm

6. L = Arm length
7. d3 = Distance between holes
8. ∠ = Arm tilt angle

#### Base Plate

9. L1 = Dimension of base plate
10. L2 = Distance between holes
11. T2 = Plate Thickness
12. K = Hole Size
13. Q1 = No. of holes

#### Anchor Bolts


14. L3 = Bolt height
15. M = Bolt diameter
16. Q2 = No. of bolts required/Pole.

#### Pole Foundation

17. L4 = Deep of pole foundation
18. W1 = length of pole foundation
19. W2 = Width of pole foundation

#### Notes

20. Materials: Q235
21. Finish: Hot dip galvanized + Plastic spray
22. Maximum wind speed 126 Km/Hr

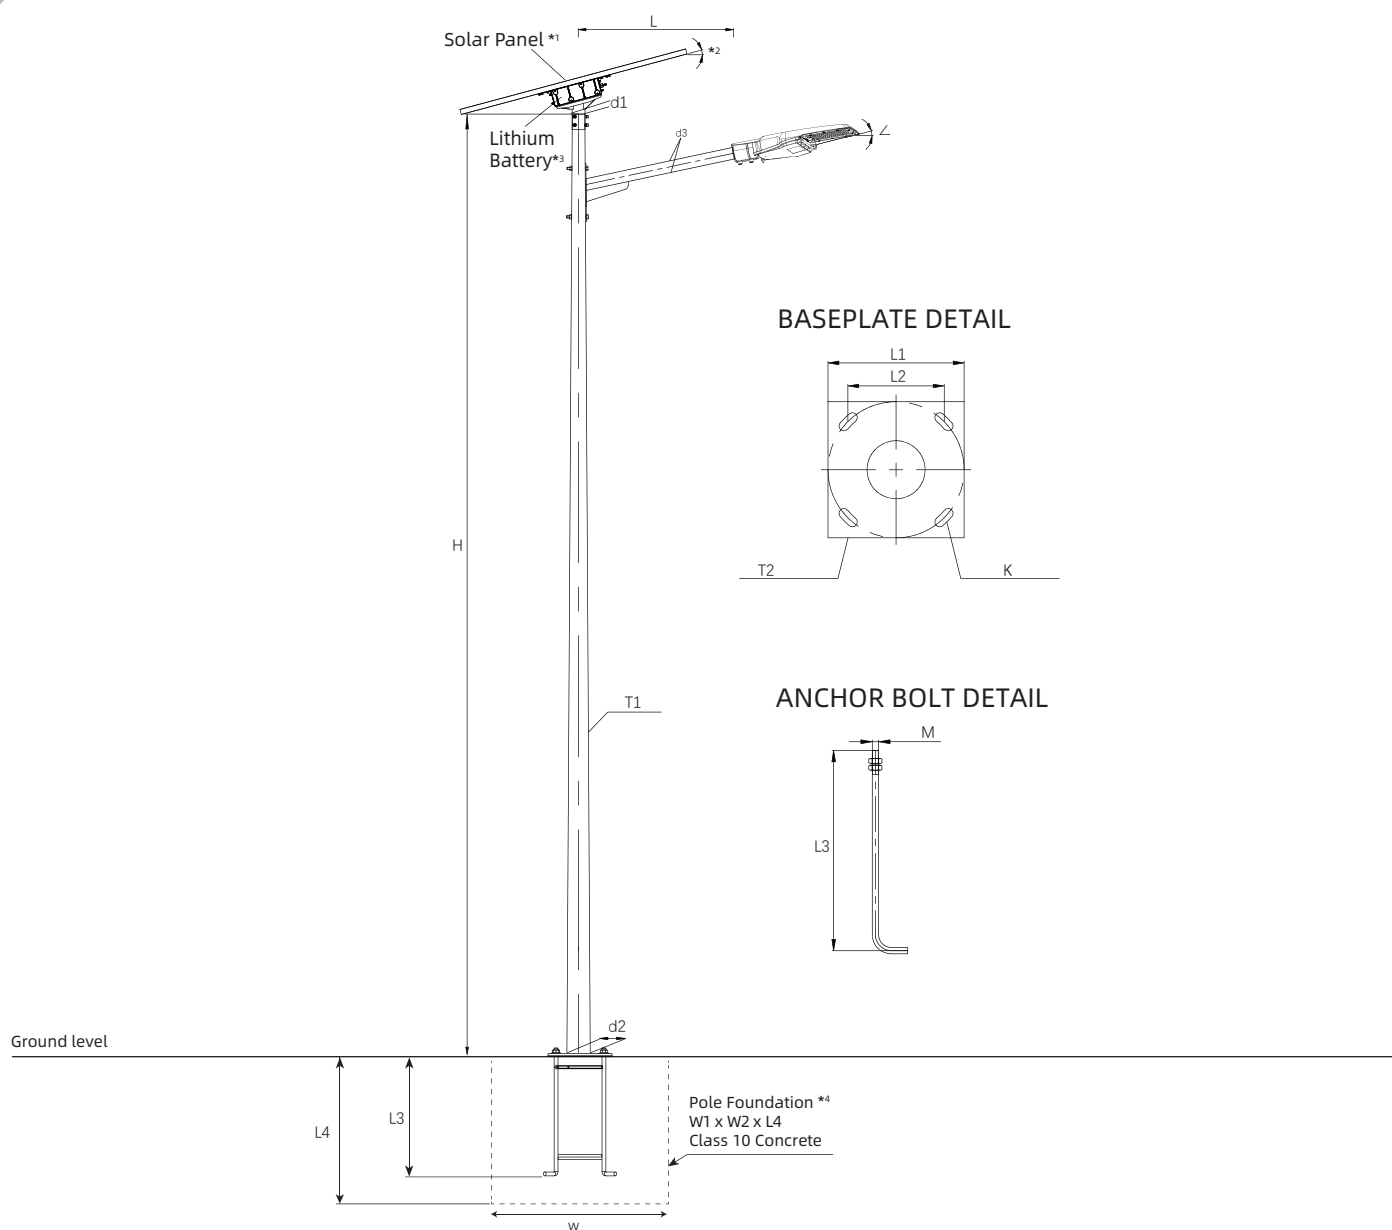

### Please note:

- \*1 Solar panel size varies according to different power requirements due to geographical locations.
- \*2 The factory default angle for the solar panel is 15°, but it can be customized based on the installation latitude for optimal performance.
- \*3 Depending on the autonomy days required, the capacity of the lithium battery will vary according to different power consumption needs.
- \*4 Only indicative, dependent on soil condition. After evaluating site conditions, please contact certified structural engineer.